UNIT SCHEDULE

SHEET A-001

PROJECT: RIVERSIDE APARTMENTS, BUILDING 2 (SYNTHETIC FIXTURE - NOT A REAL PROJECT)

TYPE	DESCRIPTION	UNITS
A	1 BED / 1 BATH	3
B	2 BED / 2 BATH	2

TOTAL UNITS: 5

GENERAL NOTES:

1. KITCHEN COUNTERTOPS: POST-FORMED PLASTIC LAMINATE, 30 IN. DEEP, CONTINUOUS ALONG DIMENSIONED RUNS. NO SINK OR RANGE CUTOUTS THIS PHASE.
2. ONE CULTURED-MARBLE VANITY PER UNIT THIS PHASE, 21 IN. DEEP. OTHER BATHROOMS AND THEIR COUNTERS ARE EXCLUDED FROM THIS PHASE.
3. COUNTERTOP EXTENTS DIMENSIONED ON FLOOR PLANS A-101 AND A-102.
4. UNITS 104 AND 112 (TYPE A) ARE MIRRORED PLANS OF UNIT 101.
5. NO UNIT COUNT CHANGES WITHOUT ADDENDUM.

TYPE A FLOOR PLAN - 1 BEDROOM

SHEET A-101

PROJECT: RIVERSIDE APARTMENTS, BUILDING 2 (SYNTHETIC FIXTURE - NOT A REAL PROJECT)
COUNTERTOP PLAN. SCALE: 1/4" = 1'-0"

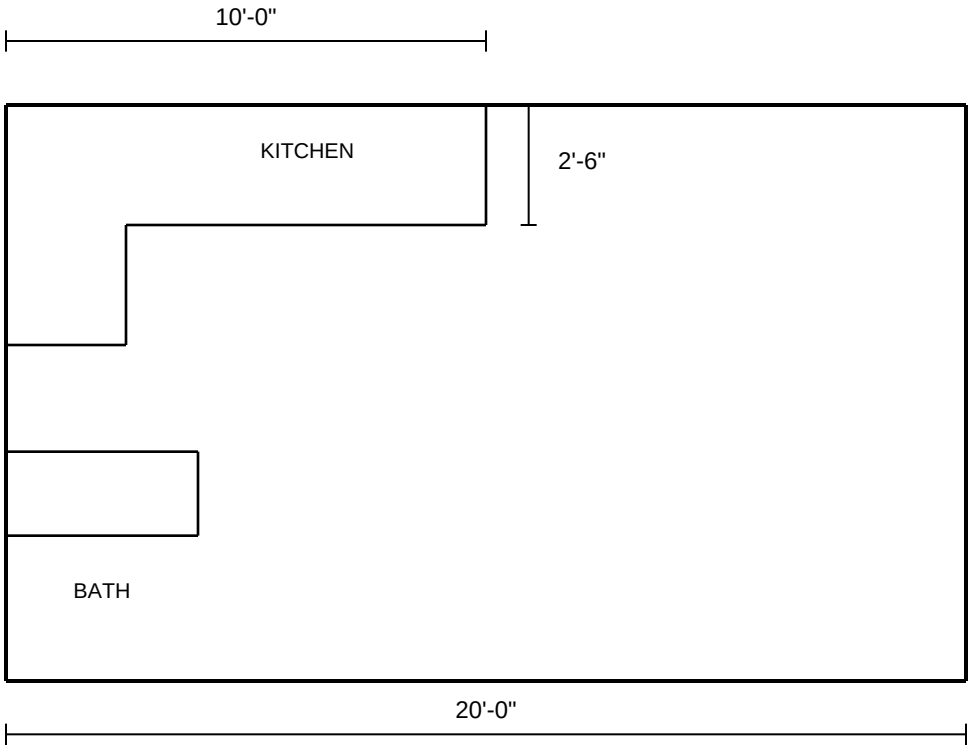

UNIT 101 TYPE A; UNIT 104 TYPE A; UNIT 112 TYPE A

TYPICAL PLAN APPLIES TO EACH TAGGED UNIT.

TYPE B FLOOR PLAN - 2 BEDROOM

SHEET A-102

PROJECT: RIVERSIDE APARTMENTS, BUILDING 2 (SYNTHETIC FIXTURE - NOT A REAL PROJECT)
COUNTERTOP PLAN. SCALE: 1/4" = 1'-0"

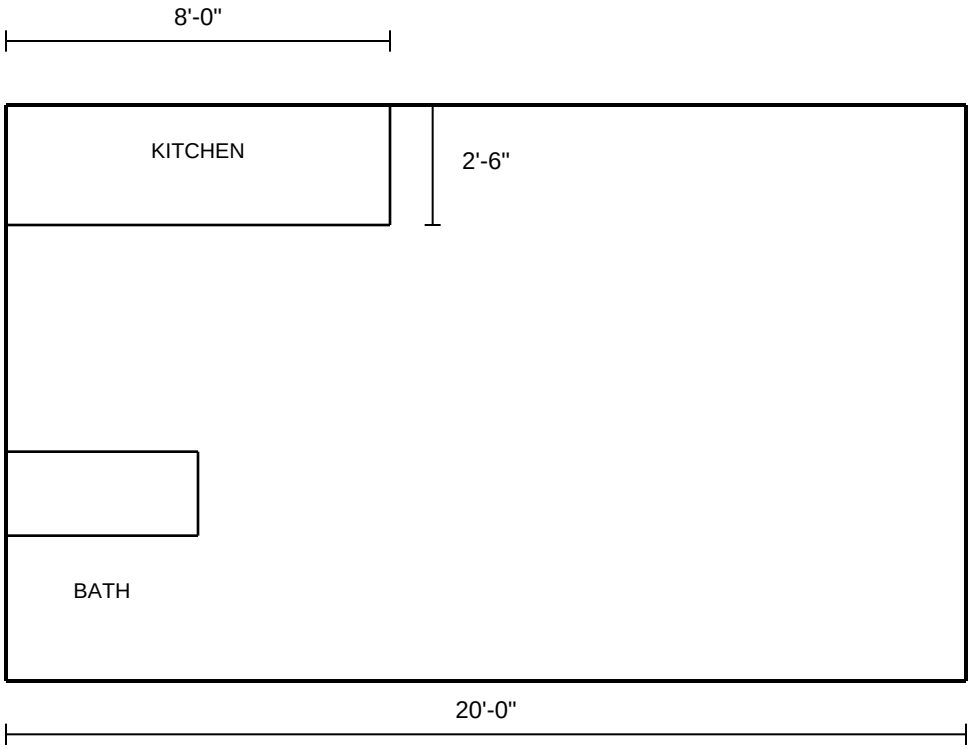

UNIT 201 TYPE B; UNIT 202 TYPE B

TYPICAL PLAN APPLIES TO EACH TAGGED UNIT.